

Environmental Impact Assessment of Transportation Networks with Degradable Links in an Era of Climate Change

John F. Smith Memorial Professor Anna Nagurney[§]
Doctoral Student Qiang Qiang[§]
Professor Ladimer S. Nagurney[†]

[§]Isenberg School of Management
University of Massachusetts
Amherst, Massachusetts 01003

[†]Department of Electrical and Computer Engineering
University of Hartford
West Hartford, Connecticut 06117

Acknowledgements

This research was supported in part by

- The National Science Foundation under Grant No.: IIS-0002647 Awarded to John F. Smith Memorial Professor Anna Nagurney.
- John F. Smith Memorial Fund - University of Massachusetts at Amherst.

This support is gratefully acknowledged.

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions
- 4 The Environmental Impact Assessment Indices
- 5 Link Importance Identification and Ranking
- 6 Numerical Examples
- 7 Summary and Conclusions

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions
- 4 The Environmental Impact Assessment Indices
- 5 Link Importance Identification and Ranking
- 6 Numerical Examples
- 7 Summary and Conclusions

The U.S. Ailing Infrastructure

- **Over one-quarter** of the nation's 590,750 bridges were rated structurally deficient or functionally obsolete. The degradation of transportation networks due to poor maintenance, natural disasters, deterioration over time, as well as unforeseen attacks now lead to estimates of **\$94 billion** in the U.S. in terms of needed repairs for roads alone. Poor road conditions in the U.S. cost motorists **\$54 billion** in repairs and operating costs annually (ASCE Survey (2005)).
- Due to the constant breakdowns of the U.S. transportation networks and the increasing number of vehicles, American commuters now spend **3.5 billion hours** a year stuck in traffic, which translates to a cost of **\$63.2 billion** a year to the economy (ASCE (2005)).

The U.S. Ailing Infrastructure

- The U.S. is experiencing a freight capacity crisis that threatens the strength and productivity of the U.S. economy. According to the American Road & Transportation Builders Association (see Jeanneret (2006)), nearly **75%** of U.S. freight is carried in the U.S. on highways, and bottlenecks are causing truckers **243 million hours** of delay annually with an estimated associated cost of **\$8 billion**.
- The number of motor vehicles in the U.S. has risen by **157 million (or 212.16%)** since 1960 while the population of licensed drivers grew by **109 million (or 125.28%)** (U.S. Department of Transportation (2004)).

Transportation Network Capacity and Its Environmental Impact

- According to a U.S. EPA (2006) report, the transportation sector in 2003 accounted for 27% of the total greenhouse gas emissions in the U.S. and the increase in this sector was the largest of any in the period 1990 – 2003.
- The energy use due to transportation is expected to increase by 48% between 2003 and 2025, even with modest improvements in the efficiency of vehicular engines.
- A study claims that infrastructure capacity increases are directly linked to decreases in polluting emissions from motor vehicles. Using a traffic micro-simulation, it showed, for example, that upgrading narrow, winding roads or adding a lane to a congested motorway can yield decreases of up to 38% in CO_2 emissions, 67% in CO emissions and 75% in NO_x emissions, without generating substantially more car trips (Knudsen and Bang (2007)).



Figure: Melting Ground and Sea Ice Destroying Villages in Alaska,
Source: globalwarming.house.gov



Figure: Examples from Alaska, Source: Smith and Levasseur



Figure: Roads are Damaged by Floods, Source: The Oregonian

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions
- 4 The Environmental Impact Assessment Indices
- 5 Link Importance Identification and Ranking
- 6 Numerical Examples
- 7 Summary and Conclusions

Related Literature

- Network Vulnerability and Robustness
 - Berdica (2002), Sakakibara, Kajitani, and Okada (2004), Scott et al. (2006), Taylor, Sekhar, and D'Este (2006), Murray and Grubestic (2007), Jenelius (2007)
- Transportation Networks and Emissions under Different User Behaviors
 - Wigan (1975)
 - Taylor and Anderson (1984)
 - Yin and Lawphongpanich (2006)

Our Research on Network Efficiency, Vulnerability, and Robustness I

- Nagurney, A., Qiang, Q., 2007a. A network efficiency measure for congested networks. *Europhysics Letters* 79, 38005.
- Nagurney, A., Qiang, Q., 2007b. A transportation network efficiency measure that captures flows, behavior, and costs with applications to network component importance identification and vulnerability. *Proceedings of the 18th Annual POMS Conference*.
- Nagurney, A., Qiang, Q., 2007c. Robustness of transportation networks subject to degradable links. *Europhysics Letters* 80, 68001.
- Nagurney, A., Qiang, Q., 2007d. A network efficiency measure with application to critical infrastructure networks. *Journal of Global Optimization* 40, 261-275.

Our Research on Network Efficiency, Vulnerability, and Robustness II

- Nagurney, A., Qiang, Q., 2008a. A relative total cost index for the evaluation of transportation network robustness in the presence of degradable links and alternative travel behavior. *International Transactions in Operational Research*, in press.
- Nagurney, A., Qiang, Q., 2008b. An efficiency measure for dynamic networks with application to the Internet and vulnerability analysis. *Netnomics*, in press.
- Qiang, Q., Nagurney, A., 2008c. A unified network performance measure with importance identification and the ranking of network components. *Optimization Letters* 2, 127-142.

Our Research on Network Efficiency, Vulnerability, and Robustness III

- Nagurney, A., Qiang, Q., 2008d. Identification of critical nodes and links in financial networks with intermediation and electronic transactions. In **Computational Methods in Financial Engineering**. Kontoghiorghes, E. J., Rustem, B., Winker, P., Editors, Springer, Berlin, Germany, pp 273-297.

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions**
- 4 The Environmental Impact Assessment Indices
- 5 Link Importance Identification and Ranking
- 6 Numerical Examples
- 7 Summary and Conclusions

Notation for the Transportation Network Models

- Network \mathcal{G} with the set of links L with n_L elements, the set of paths P with n_P elements, and the set of O/D pairs W with n_W elements.
- The set of (acyclic) paths connecting O/D pair w are denoted by P_w , the links by a, b , etc, the paths by p, q , etc., and the O/D pairs by w_1, w_2 , etc.
- The flow on path p is denoted by x_p and the flow on link a by f_a . x is the column vector of all path flows and f is the column vector of all link flows.
- Travel cost on a path p is denoted by C_p and the travel cost on a link a by c_a . C is the column vector of all path costs and c is the column vector of all link costs. Assume that the user link cost functions are continuous.
- Denote the travel demand between O/D pair w by d_w and the travel disutility by λ_w , where d_w is fixed and known for all w .

Conservation of Flow Between Demands and Path Flows

$$d_w = \sum_{p \in P_w} x_p, \quad \forall w \in W, \quad (1)$$

Conservation of Flow Between Link Flows and Path Flows

$$f_a = \sum_{p \in P} x_p \delta_{ap}, \quad \forall a \in L, \quad (2)$$

where $\delta_{ap} = 1$, if path p contains link a , and $\delta_{ap} = 0$, otherwise.

Link Costs and Path Costs

$$C_p = \sum_{a \in L} c_a \delta_{ap}, \quad \forall p \in P, \quad (3)$$

The user cost on link a is denoted by c_a where

$$c_a = c_a(f_a), \quad \forall a \in L. \quad (4)$$

Bureau of Public Roads (BPR) (1964) Link Cost Function

$$c_a(f_a) = t_a^0 \left[1 + k \left(\frac{f_a}{u_a} \right)^\beta \right], \quad \forall a \in L, \quad (5)$$

u_a is the “practical” capacity on link a , which also has the interpretation of the level-of-service flow rate; t_a^0 is the free-flow travel time or cost on link a ; k and β are the model parameters and both take on positive values. Typically, in applications, $k = .15$ and $\beta = 4$.

The Total Cost on Link a , denoted by \hat{c}_a

$$\hat{c}_a = \hat{c}_a(f_a) = c_a(f_a) \times f_a = t_a^0 \left[1 + k \left(\frac{f_a}{u_a} \right)^\beta \right] \times f_a, \quad \forall a \in L. \quad (6)$$

The Total Cost on a Network, denoted by TC

$$TC = \sum_{a \in L} \hat{c}_a(f_a), \quad (7)$$

where the link flows f must lie in the feasible set \mathcal{K} :

$$\mathcal{K} \equiv \{f \in R_+^{n_L} \mid \exists x \in R_+^{n_P} \text{ satisfying (1), (2)}\}.$$

The U-O and S-O models that we utilize are classical (see Beckmann, McGuire, and Winsten (1956) and Dafermos and Sparrow (1969)).

The User-Optimized (U-O) Problem

A path flow pattern $x^* \in \mathcal{K}^1$, where $\mathcal{K}^1 \equiv \{x | x \in R_+^{nP}$ and $d_w = \sum_{p \in P_w} x_p, \forall w \in W$ holds}, is said to be a transportation network equilibrium, in the case of fixed demands, if the following condition holds for each O/D pair $w \in W$ and every path $p \in P_w$:

$$C_p(x^*) - \lambda_w^* \begin{cases} = 0, & \text{if } x_p^* > 0, \\ \geq 0, & \text{if } x_p^* = 0. \end{cases} \quad (8)$$

Equivalent Optimization Problem

The equilibrium link flow (and path flow pattern) can be obtained via the solution of the following optimization problem:

$$\text{Minimize}_{f \in \mathcal{K}} \sum_{a \in L} \int_0^{f_a} c_a(y) dy. \quad (9)$$

The System-Optimized (S-O) Problem

Assume that there is a central controller of the traffic who routes the traffic in an optimal manner so as to minimize the total cost in the network. That is,

$$\text{Minimize}_{f \in \mathcal{K}} \sum_{a \in L} \hat{c}_a(f_a) \quad (10)$$

The total cost on a path, denoted by \hat{C}_p , is the user cost on a path times the flow on a path, that is,

$$\hat{C}_p = C_p x_p, \quad \forall p \in P, \quad (11)$$

where the user cost on a path, C_p , is given by (3).

In view of (2), (3), and (4), one may express the cost on a path p as a function of the path flow variables and, hence, an alternative version of the above S-O problem with objective function (10) can be stated in path flow variables only, where one has now the problem:

$$\text{Minimize}_{x \in \mathcal{K}^1} \sum_{p \in P} C_p(x) x_p \quad (12)$$

System-Optimality Conditions

Under the assumption of increasing user link cost functions, the objective function (10) in the S-O problem is convex, and the feasible set \mathcal{K}^1 is also convex. Therefore, the optimality conditions, that is, the Kuhn-Tucker conditions are: for each O/D pair $w \in W$ and each path $p \in P_w$, the flow pattern $x \in \mathcal{K}^1$, must satisfy:

$$\hat{C}'_p(x) \begin{cases} = \mu_w, & \text{if } x_p > 0, \\ \geq \mu_w, & \text{if } x_p = 0, \end{cases} \quad (13)$$

where $\hat{C}'_p(x)$ denotes the marginal of the total cost on path p , given by:

$$\hat{C}'_p(x) = \sum_{a \in L} \frac{\partial \hat{C}_a(f_a)}{\partial f_a} \delta_{ap} \quad (14)$$

evaluated in (13) at the solution and μ_w is the Lagrange multiplier associated with constraint (1) for that O/D pair w .

Emission Functions

- Alexopoulos and Assimacopoulos (1993) have argued that carbon monoxide (CO), since it is emitted exclusively by vehicular traffic, is important as an indicator for the level of atmospheric pollution generated by such traffic.
- It has been shown that CO is the most significant pollutant among all other types of vehicle emissions (cf. US Department of Transportation Federal Highway Administration (2006b)).
- It is noted that other pollutants that are related to congestion exhibit similar behavior (cf. Hizir (2006) and the California Air Resources Board (2005)).

Emission Functions (Cont'd)

Yin and Lawphongpanich (2006) utilized the following function to estimate vehicular CO emissions:

$$e_a(f_a) = 0.2038 \times c_a(f_a) \times e^{0.7962 \times (\frac{l_a}{c_a(f_a)})} \quad (15)$$

where l_a denotes the length of link a and c_a (cf. (4)) corresponds to the travel time (in minutes) to traverse link a . The length l_a is measured in kilometers for each link $a \in L$ and the emissions are in grams per hour.

The expression for total CO emissions on a link a , denoted by $\hat{e}_a(f_a)$, is then given by:

$$\hat{e}_a(f_a) = e_a(f_a) \times f_a. \quad (16)$$

The total emissions of CO generated on a network is denoted by TE and is, hence:

$$\text{TE} = \sum_{a \in L} \hat{e}_a(f_a). \quad (17)$$

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions
- 4 The Environmental Impact Assessment Indices**
- 5 Link Importance Identification and Ranking
- 6 Numerical Examples
- 7 Summary and Conclusions

The Environmental Impact Assessment Indices for Transportation Networks

The environmental impact assessment indices for a transportation network G with the vector of demands d , the vector of user link cost functions c , and the vector of link capacities u are defined as the relative total emission increase under a given uniform capacity retention ratio γ ($\gamma \in (0, 1]$) so that the new capacities (cf. (5)) are given by γu . Let \bar{c} denote the vector of BPR user link cost functions and let \bar{d} denote the vector of O/D pair travel demands.

The Environmental Impact Assessment Index Under the U-O Flow Pattern

$$EI_{U-O}^{\gamma} = EI_{U-O}(G, c, d, \gamma, u) = \frac{TE_{U-O}^{\gamma} - TE_{U-O}}{TE_{U-O}} \quad (18)$$

where TE_{U-O} and TE_{U-O}^{γ} are the total emissions generated under the user-optimizing flow pattern with the original capacities and the remaining capacities (i.e., γu), respectively.

The Environmental Impact Assessment Indices for Transportation Networks (Cont'd)

The Environmental Impact Assessment Index Under the S-O Flow Pattern

$$EI_{S-O}^{\gamma} = EI_{S-O}(G, c, d, \gamma, u) = \frac{TE_{S-O}^{\gamma} - TE_{S-O}}{TE_{S-O}} \quad (19)$$

where TE_{S-O} and TE_{S-O}^{γ} are the total emissions generated at the system-optimizing flow pattern with the original capacities and the remaining capacities (i.e., γu), respectively.

A transportation network, under a given capacity retention/deterioration ratio γ (and under either the S-O or the U-O travel behavior), is considered to be *environmentally* robust if the index EI^{γ} is low. This means that the relative total emissions do not change much and, hence, the transportation network may be viewed as being more robust, from an environmental perspective.

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions
- 4 The Environmental Impact Assessment Indices
- 5 Link Importance Identification and Ranking**
- 6 Numerical Examples
- 7 Summary and Conclusions

Link Importance Identification and Ranking

Link importance indicators from the point of view of environmental impact assessment:

$$I'_{U-O} = \frac{\text{TE}_{U-O}(G - l) - \text{TE}_{U-O}}{\text{TE}_{U-O}} \quad (20)$$


$$I'_{S-O} = \frac{\text{TE}_{S-O}(G - l) - \text{TE}_{S-O}}{\text{TE}_{S-O}} \quad (21)$$

where I'_{U-O} denotes the importance indicator for link l assuming the U-O behavior and I'_{S-O} denotes the analogue under the S-O behavior; $\text{TE}_{U-O}(G - l)$ denotes the total emissions generated under the U-O behavior if link l is removed from the network and $\text{TE}_{S-O}(G - l)$ denotes the same but under the S-O behavior. Based on the specific values of (20) and (21) the links for a given transportation network can then be ranked.

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions
- 4 The Environmental Impact Assessment Indices
- 5 Link Importance Identification and Ranking
- 6 Numerical Examples**
- 7 Summary and Conclusions

The Yin and Lawphongpanich (2006) Network

The topology of the first transportation network that we studied is depicted on the right. There are two O/D pairs in the network: $w_1 = (1, 3)$ and $w_2 = (2, 4)$ with demands of $d_{w_1} = 3000$ vehicles per hour and $d_{w_2} = 3000$ vehicles per hour. The user link cost functions, which here correspond to travel time in minutes, are of the BPR form given by (5) and are as follows:

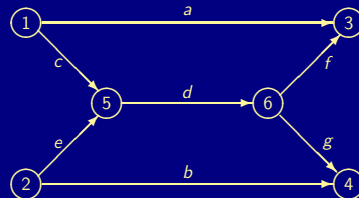

$$c_a(f_a) = 8(1 + .15(f_a/2000)^4), \quad c_b(f_b) = 9(1 + .15(f_b/2000)^4),$$

$$c_c(f_c) = 2(1 + .15(f_c/2000)^4), \quad c_d(f_d) = 6(1 + .15(f_d/4000)^4)$$

$$c_e(f_e) = 3(1 + .15(f_e/2000)^4), \quad c_f(f_f) = 3(1 + .15(f_f/2500)^4),$$

$$c_g(f_g) = 4(1 + .15(f_g/2500)^4).$$

The Yin and Lawphongpanich (2006) Network (Cont'd)

The lengths of the links, in kilometers, in turn, which are needed to compute the environmental emissions are given by:

$$l_a = 8.0, l_b = 9.0, l_c = 2.0, l_d = 6.0, l_e = 3.0, l_f = 3.0, l_g = 4.0.$$

Table: Total Emissions Generated (grams/hour) and Environmental Impact Indicators for Varying Degradable Capacities for the Yin and Lawphongpanich (2006) Network

γ	TE_{U-O}^γ	EI_{U-O}^γ	TE_{S-O}^γ	EI_{S-O}^γ
1.	26,744.62	.0000	27,140.19	.0000
.9	27,336.24	.0221	27,565.00	.0157
.8	27,982.55	.0463	28,045.61	.0334
.7	28,820.11	.0776	28,753.98	.0595
.6	30,291.05	.1326	30,162.84	.1114
.5	33,874.37	.2666	33,758.30	.2438
.4	45,033.94	.6839	44,970.11	.6570
.3	88,964.12	2.3364	88,943.63	2.2772
.2	355,639.84	12.2976	355,636.28	12.1037
.1	5,351,015.00	199.0782	5,351,016.50	196.1621

Figure: Ratio of TE_{U-O}^γ to TE_{S-O}^γ for the Yin and Lawphongpanich (2006) Network



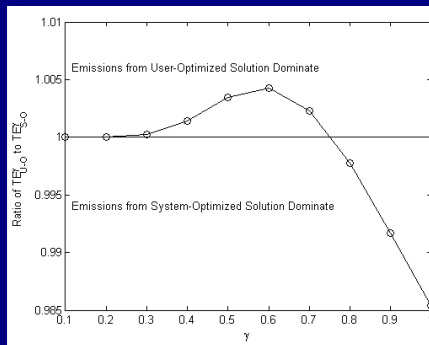


Figure: Plot of EI_{U-O}^γ and EI_{S-O}^γ for the Yin and Lawphongpanich (2006) Network

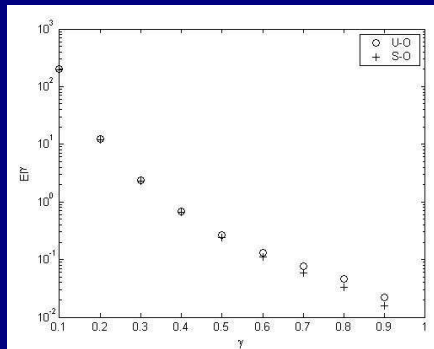


Link Importance

Figure: Link Importance Values and Rankings Under the U-O and the S-O Behavior for the Yin and Lawphongpanich (2006) Network

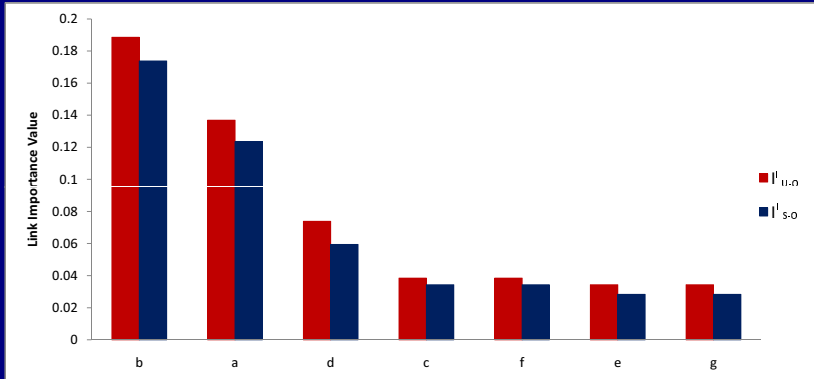

The Sioux Falls Network

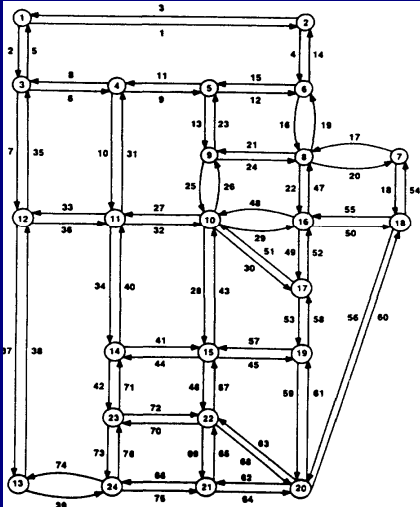

There are 528 O/D pairs, 24 nodes, and 76 links in the Sioux-Falls network.

Algorithms

- The projection method (cf. Dafermos (1980) and Nagurney (1999)) with the embedded Dafermos and Sparrow (1969) equilibration algorithm (see also, e.g., Nagurney (1984)) and the column generation algorithm (cf. Leventhal, Nemhauser, and Trotter (1973)) were utilized to compute the equilibrium solutions.
- Based on the equilibrium solutions, the network efficiency was determined and the importance values and the importance rankings of the links were computed.

Table: Total Emissions Generated (grams/hour) and Environmental Impact Indicators for Varying Degradable Capacities for the Sioux Falls Network

γ	$TE_{U-o}^{\gamma} (\times 10^6)$	EI_{U-o}^{γ}	$TE_{S-o}^{\gamma} (\times 10^6)$	EI_{S-o}^{γ}
1.	2.2323	.0000	5.2578	.0000
.9	2.5964	.1636	7.2030	.3700
.8	3.2447	.4542	10.6592	1.0273
.7	4.4820	1.0087	17.2023	2.2717
.6	7.0677	2.1675	30.7401	4.8466
.5	13.1320	4.8854	62.3732	10.8631
.4	30.0623	12.4720	150.5202	27.6279
.3	92.0500	40.2540	473.1643	88.9920
.2	460.5401	205.3999	2390.7321	453.6959
.1	7348.6102	3292.4000	38235.1022	7271.0529

Figure: Ratio of TE_{U-O}^{γ} to TE_{S-O}^{γ} for the Sioux Falls Network


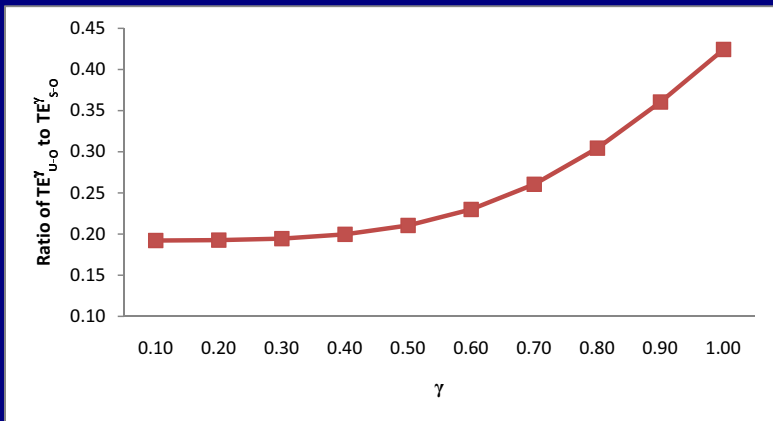


Figure: Ratio of EI_{U-O}^γ to EI_{S-O}^γ for the Sioux Falls Network

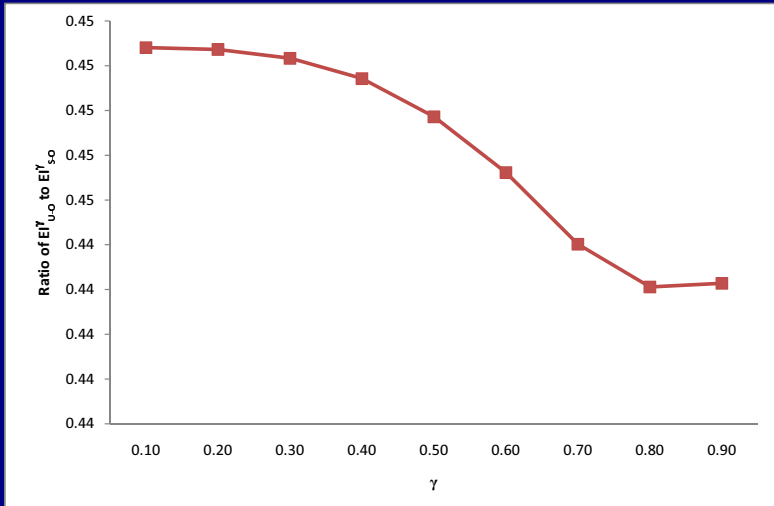

- 1 Motivation
- 2 Literature
- 3 Transportation Networks and Emissions
- 4 The Environmental Impact Assessment Indices
- 5 Link Importance Identification and Ranking
- 6 Numerical Examples
- 7 Summary and Conclusions**

- We proposed environmental impact assessment indicators that allow one to determine the environmental impacts of the degradation in transportation network link capacities.
- The proposed indicators can evaluate the impacts associated with either the U-O behavior or the S-O behavior.
- We illustrated through numerical examples that there may be ranges of link capacity deterioration for which the U-O behavior yields lower emissions than the S-O behavior and vice versa.
- We also proposed link importance indicators that allow for the evaluation of the impact on environmental emissions if a link deteriorates to such a degree that it is no longer usable.
- Further research should include the extension of the results in this paper to multimodal transportation networks and multiple pollutants as well as theoretical and computational sensitivity analysis studies.

EN English (United States) ?

Supernetworks for Optimal Decision-Making and Improving the Global Quality of Life

[Home](#)
[About](#)
[Background](#)
[Activities](#)
[Publications](#)
[Media](#)
[Links](#)
[What's New](#)
[Search](#)




Humanitarian Logistics Conference
Bellagio, Italy

The Virtual Center for Supernetworks at the Isenberg School of Management under the directorship of Anna Nagurney, the John F. Smith Memorial Professor, is interdisciplinary center, and includes the Supernetworks Laboratory for Computation Visualization.

Mission: The mission of the Virtual Center for Supernetworks is to foster the study application of supernetworks and to serve as a resource to academia, industry, and government on networks ranging from transportation, supply chains, telecommunication, and electric power networks to economic, environmental, financial, knowledge and social networks.

The Applications of Supernetworks Include: multimodal transportation networks, critical infrastructure, energy and the environment, the Internet and electronic commerce, global supply chain management, international financial networks, web-based advertising, complex networks and decision-making, integrated social and economic network games, and network metrics.

<p style="text-align: center;"><u>Announcements and Notes from the Center Director</u> <u>Professor Anna Nagurney</u></p> <p style="text-align: center;">Updated: October 4, 2008</p>	 <p style="text-align: center;">Fall 2008 Operations Research / Management Science Seminar Series</p>	<p style="text-align: center;">The Braess Paradox Translation</p>  <p style="text-align: center;">Information Photos</p>	 <p style="text-align: center;">UMass INFORMS Student Chapter</p>
 <p style="text-align: center;">Professor Nagurney's Fulbright Senior Specialist Award at the University of Catania March 2008</p>	 <p style="text-align: center;">Humanitarian Logistics: Networks for Africa</p>	 <p style="text-align: center;">Photos of Center Activities</p>	<p style="text-align: center;">FELLOWS AWARD <i>Anna Nagurney</i></p> <p style="text-align: center;"><small>For outstanding contributions and dedicated leadership to the Field of Regional Science</small></p> <p style="text-align: center;"><small>Roger R. Sengul President November 10, 2008</small></p> <p style="text-align: center;"><small>Regional Science Association International</small></p>
<p style="text-align: center;">You are visitor number</p> <p style="text-align: center; font-size: 1.2em;">52,606</p> <p style="text-align: center;">to the Virtual Center for Supernetworks.</p>	<p style="text-align: center;">The Supernetwork Sentinel The Newsletter of the Virtual Center for Supernetworks Fall 2008</p> <p style="text-align: center;"><small>Volume 10, No. 303, October 2008</small></p> <p style="text-align: center;">Fall 2008 Issue</p>	<p style="text-align: center; font-size: 1.5em;">Downloadable Articles</p>	 <p style="text-align: center;">Google Search</p>

Thank You!

For more information,
see <http://supernet.som.umass.edu>